

# HEAVY LIFTING REDEFINED

Introducing the new G-2160, from the manufacturer  
that brought you the original wide body shackle

## SAVE ON SLING COST

Widest bow on the  
market, allows higher  
efficiency of sling and  
smaller sling size

## SAVE TIME

Enhanced handling with  
three lift points: center rib  
bow and both sides of pin  
[1,2,3]

Removeable recessed  
lift point reduces snags and  
simplifies assembly

Permanent raised markings  
for easy field identification

Bow-to-bow assembly  
compatible for all sizes,  
unlike other brands

Easy-Loc™ available for  
400t, 500t, and 600t

Anti-rotation bolt head  
prevents turning during  
installation



## IMPROVE SAFETY

100% comprehensive  
production testing

- ultrasonic inspection
- magnetic particle inspection
- chemical analysis
- mechanical material testing
- visual inspection


Proof load tested up to  
2x WLL

Design factor 5:1

Type approved and  
DNV certified, which validates  
quality, safety, and performance  
characteristics

Permanent raised markings

Unmatched transparency

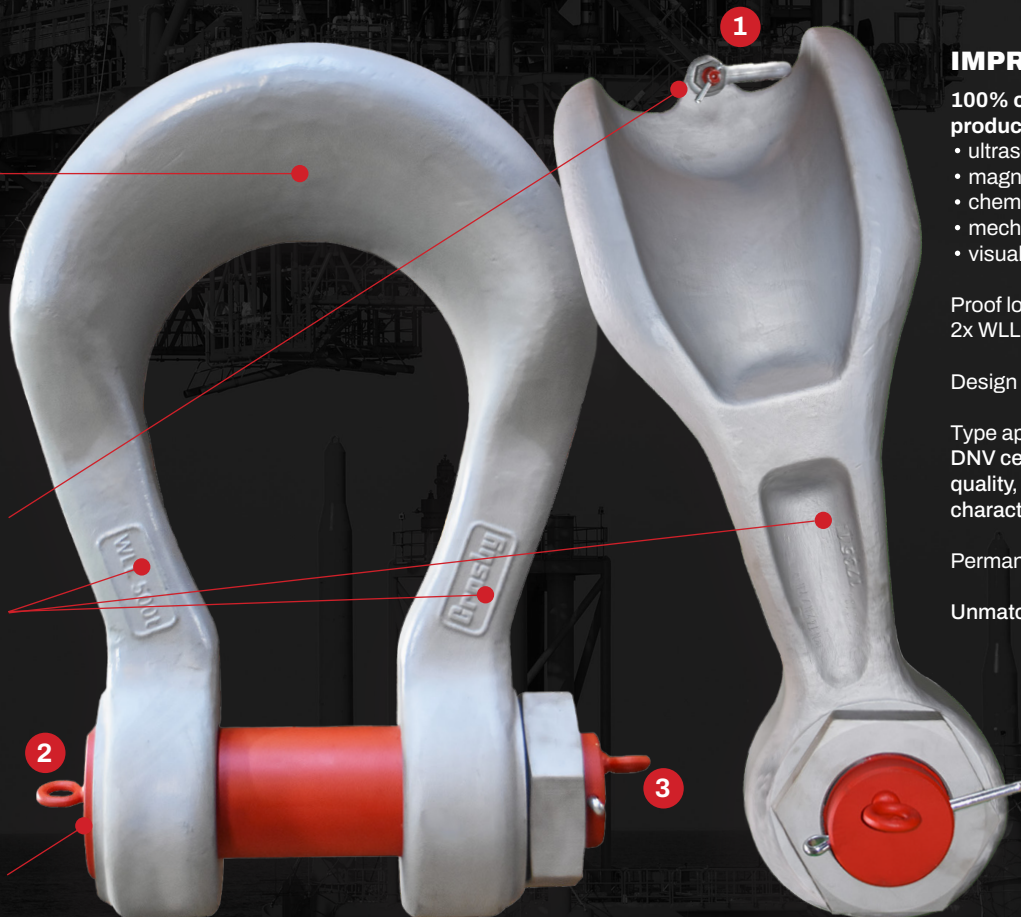

Engineered to the highest standards.  
New design available from 400t to 2000t.


# Crosby®

 KITO CROSBY™


[kitocrosby.com/widebody](http://kitocrosby.com/widebody)



# The most ergonomic design, for industry-leading safety and efficiency

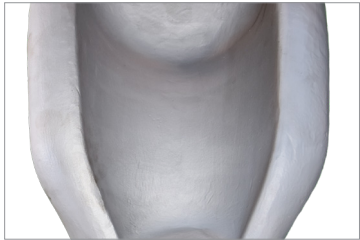


**Widest load surface area**  
The widest bow on the market, allows higher efficiency of sling and smaller sling size.

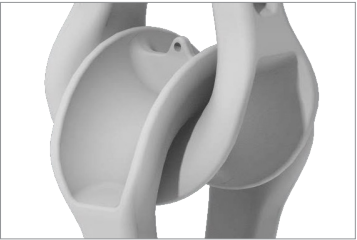

**Bow-to-bow for all sizes**  
The only shackle brand that offers bow-to-bow compatibility for all sizes in the product line.



**Anti-rotation bolt head**  
Allows for easier, safer, and faster installation.

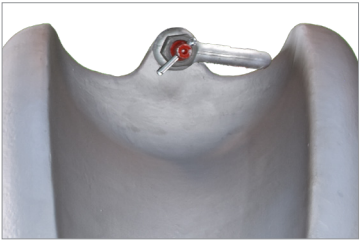

**Lifting points without snags**  
Recessed and removable lifting point reduces snags, simplifies assembly, and is centered for balanced handling.

## Bolt securement made easy with Easy-Loc™

The patented Crosby Easy-Loc bolt securement system reduces install/release times by up to 90%.



1 Open collar



2 Push collar onto bolt





3 Close collar


Available as an option for G-2160 sizes 75t – 600t (400t, 500t, and 600t in the new shackle design). Watch demo video at [kitocrosby.com/widebody](https://www.kitocrosby.com/widebody).

## The only wide body shackle with seamless Crosby Straightpoint integration

The only wide body shackle shipped from factory ready to accept a Crosby SP load pin for load monitoring and improved safety.

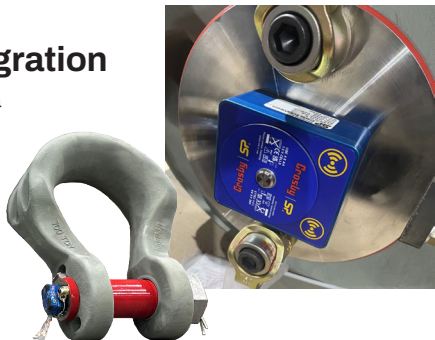

## New design available in eight capacities 400t – 2000t

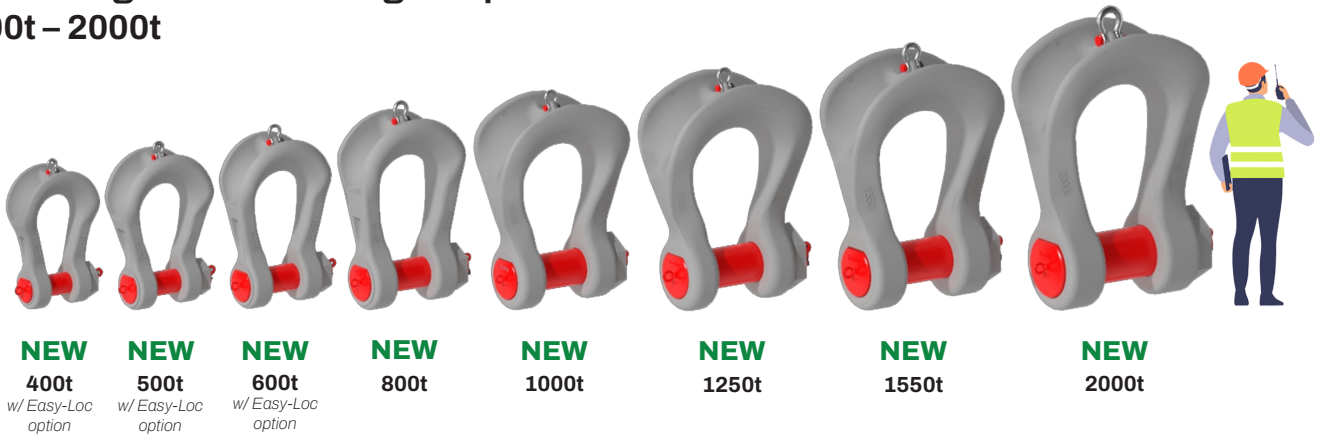

### G-2160 Wide Body Shackles (Metric)

|     | Working Load Limit (t) | Stock No. | Weight Each (kg) | Dimensions (mm) |     |      |     |     |     |      |      |     |     |     |      |    |     |     |     | Effective Body Diameter | Replacement Bolt Stock No. G-4709 |
|-----|------------------------|-----------|------------------|-----------------|-----|------|-----|-----|-----|------|------|-----|-----|-----|------|----|-----|-----|-----|-------------------------|-----------------------------------|
|     |                        |           |                  | A               | B   | C    | D   | E   | F   | G    | H    | J   | K   | L   | M    | N  | P   | R   |     |                         |                                   |
|     | 7                      | 1021256   | 1.8              | 32              | 22  | 90   | 41  | 64  | 46  | 104  | 149  | 32  | 32  | –   | 105  | –  | 24  | 18  | 53  | –                       |                                   |
|     | 12 1/2                 | 1021265   | 3.96             | 43              | 29  | 118  | 54  | 83  | 61  | 140  | 194  | 35  | 41  | –   | 137  | –  | 32  | 23  | 61  | –                       |                                   |
|     | 18                     | 1021274   | 6.71             | 52              | 35  | 148  | 64  | 102 | 68  | 172  | 238  | 38  | 51  | –   | 170  | –  | 36  | 30  | 71  | 1083349                 |                                   |
|     | 30                     | 1021276   | 11.93            | 70              | 41  | 176  | 80  | 127 | 89  | 216  | 289  | 64  | 64  | –   | 206  | –  | 45  | 35  | 104 | 3711377                 |                                   |
|     | 40                     | 1021278   | 21.23            | 86              | 51  | 205  | 95  | 152 | 102 | 270  | 346  | 44  | 76  | –   | 259  | –  | 59  | 43  | 91  | 3711392                 |                                   |
|     | 55                     | 1021287   | 30.6             | 83              | 57  | 238  | 114 | 178 | 118 | 311  | 397  | 51  | 89  | –   | 263  | –  | 67  | 51  | 109 | 1083375                 |                                   |
|     | 75                     | 1022101   | 50.4             | 105             | 70  | 293  | 127 | 185 | 136 | 321  | 474  | 95  | 93  | 102 | 382  | 46 | 70  | 61  | 160 | 1083400                 |                                   |
|     | 125                    | 1022110   | 86.9             | 130             | 80  | 365  | 150 | 220 | 165 | 393  | 584  | 95  | 110 | 102 | 465  | 46 | 89  | 79  | 173 | 1089533                 |                                   |
|     | 200                    | 1022118   | 189              | 150             | 105 | 480  | 217 | 275 | 214 | 515  | 773  | 133 | 138 | 102 | 491  | 46 | 126 | 86  | 241 | 1089542                 |                                   |
|     | 300                    | 1022127   | 363              | 187             | 133 | 600  | 264 | 321 | 267 | 608  | 957  | 156 | 160 | 102 | 574  | 46 | 147 | 109 | 290 | 1089551                 |                                   |
| NEW | 400                    | 1021336   | 535              | 220             | 160 | 620  | 360 | 375 | 314 | 668  | 1062 | 183 | 188 | –   | 780  | –  | 205 | 150 | 363 | 1511032                 |                                   |
| NEW | 500                    | 1021345   | 796              | 250             | 180 | 685  | 435 | 455 | 340 | 792  | 1190 | 222 | 228 | –   | 863  | –  | 245 | 164 | 439 | 1511033                 |                                   |
| NEW | 600                    | 1021354   | 1003             | 275             | 200 | 740  | 475 | 489 | 375 | 816  | 1292 | 243 | 263 | –   | 938  | –  | 265 | 182 | 480 | 1511034                 |                                   |
| NEW | 800                    | 1021363   | 1535             | 342             | 230 | 820  | 536 | 554 | 440 | 904  | 1462 | 272 | 300 | –   | 1078 | –  | 307 | 212 | 540 | 1511037                 |                                   |
| NEW | 1000                   | 1021381   | 2262             | 404             | 270 | 850  | 610 | 640 | 500 | 1116 | 1584 | 338 | 320 | –   | 1187 | –  | 349 | 233 | 643 | 1511021                 |                                   |
| NEW | 1250                   | 1021390   | 3085             | 442             | 300 | 928  | 675 | 708 | 570 | 1259 | 1749 | 371 | 354 | –   | 1322 | –  | 386 | 249 | 709 | 1511027                 |                                   |
| NEW | 1550                   | 1021399   | 3802             | 470             | 320 | 1010 | 720 | 755 | 615 | 1314 | 1891 | 397 | 378 | –   | 1427 | –  | 413 | 290 | 757 | 1511028                 |                                   |
| NEW | 2000                   | 1021408   | 5383             | 520             | 385 | 1140 | 770 | 810 | 680 | 1412 | 2120 | 431 | 405 | –   | 1597 | –  | 447 | 323 | 816 | 1511029                 |                                   |

### G-2160 Wide Body Shackles (Imperial)

|     | Working Load Limit (t) | Stock No. | Weight Each (lb) | Dimensions (in) |       |       |       |       |       |       |       |       |       |   |       |     |       |       |      | Effective Body Diameter | Replacement Bolt Stock No. G-4709 |
|-----|------------------------|-----------|------------------|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|---|-------|-----|-------|-------|------|-------------------------|-----------------------------------|
|     |                        |           |                  | A               | B     | C     | D     | E     | F     | G     | H     | J     | K     | L | M     | N   | P     | R     |      |                         |                                   |
|     | 7                      | 1021256   | 4.0              | 1.25            | .88   | 3.56  | 1.60  | 2.5   | 1.82  | 4.10  | 5.87  | 1.25  | 1.25  | – | 4.14  | –   | .96   | .69   | 2.1  | –                       |                                   |
|     | 12 1/2                 | 1021265   | 8.8              | 1.69            | 1.13  | 4.63  | 2.13  | 3.26  | 2.38  | 5.51  | 7.63  | 1.37  | 1.63  | – | 5.38  | –   | 1.25  | .92   | 2.4  | –                       |                                   |
|     | 18                     | 1021274   | 14.9             | 2.03            | 1.38  | 5.81  | 2.50  | 4.00  | 2.69  | 6.76  | 9.38  | 1.50  | 2.00  | – | 6.69  | –   | 1.41  | 1.16  | 2.8  | 1083349                 |                                   |
|     | 30                     | 1021276   | 26.3             | 2.74            | 1.63  | 6.94  | 3.13  | 5.00  | 3.50  | 8.50  | 11.38 | 2.50  | 2.50  | – | 8.10  | –   | 1.75  | 1.38  | 4.1  | 3711377                 |                                   |
|     | 40                     | 1021278   | 46.8             | 3.38            | 2.00  | 8.06  | 3.75  | 6.00  | 4.00  | 10.62 | 13.62 | 1.75  | 3.00  | – | 10.18 | –   | 2.31  | 1.69  | 3.6  | 3711392                 |                                   |
|     | 55                     | 1021287   | 68.0             | 3.25            | 2.25  | 9.36  | 4.50  | 7.00  | 4.63  | 12.26 | 15.63 | 2.00  | 3.50  | – | 10.36 | –   | 2.63  | 2.00  | 4.3  | 1083375                 |                                   |
|     | 75                     | 1022101   | 112              | 4.13            | 2.75  | 11.53 | 5.00  | 7.28  | 5.34  | 12.64 | 18.66 | 3.75  | 3.64  | 4 | 15.04 | 1.8 | 2.75  | 2.39  | 6.3  | 1083400                 |                                   |
|     | 125                    | 1022110   | 193              | 5.12            | 3.15  | 14.37 | 5.91  | 8.66  | 6.50  | 15.47 | 23.00 | 3.75  | 4.33  | 4 | 18.32 | 1.8 | 3.50  | 3.10  | 6.8  | 1089533                 |                                   |
|     | 200                    | 1022118   | 420              | 5.91            | 4.12  | 18.91 | 8.56  | 10.84 | 8.41  | 20.27 | 30.44 | 5.25  | 5.42  | 4 | 19.35 | 1.8 | 4.94  | 3.39  | 9.5  | 1089542                 |                                   |
|     | 300                    | 1022127   | 805              | 7.38            | 5.25  | 23.63 | 10.38 | 12.62 | 10.5  | 23.93 | 37.66 | 6.13  | 6.31  | 4 | 22.61 | 1.8 | 5.78  | 4.30  | 11.4 | 1089551                 |                                   |
| NEW | 400                    | 1021336   | 1180             | 8.66            | 6.30  | 24.41 | 14.17 | 14.76 | 12.36 | 26.30 | 41.81 | 7.20  | 7.38  | – | 30.71 | –   | 8.07  | 5.91  | 14.3 | 1511032                 |                                   |
| NEW | 500                    | 1021345   | 1754             | 9.84            | 7.09  | 26.97 | 17.13 | 17.90 | 13.39 | 31.19 | 46.85 | 8.74  | 8.96  | – | 33.98 | –   | 9.65  | 6.46  | 17.3 | 1511033                 |                                   |
| NEW | 600                    | 1021354   | 2210             | 10.83           | 7.87  | 29.13 | 18.70 | 19.26 | 14.76 | 32.13 | 50.87 | 9.57  | 10.35 | – | 36.93 | –   | 10.43 | 7.17  | 18.9 | 1511034                 |                                   |
| NEW | 800                    | 1021363   | 3384             | 13.46           | 9.06  | 32.28 | 21.10 | 21.81 | 17.32 | 35.59 | 57.56 | 10.71 | 11.81 | – | 42.44 | –   | 12.09 | 8.35  | 21.3 | 1511037                 |                                   |
| NEW | 1000                   | 1021381   | 4988             | 15.91           | 10.63 | 33.46 | 24.02 | 25.20 | 19.69 | 43.94 | 62.36 | 13.31 | 12.60 | – | 46.73 | –   | 13.74 | 9.17  | 25.3 | 1511021                 |                                   |
| NEW | 1250                   | 1021390   | 6802             | 17.40           | 11.81 | 36.54 | 26.57 | 27.87 | 22.44 | 49.57 | 68.86 | 14.61 | 13.94 | – | 52.05 | –   | 15.20 | 9.80  | 27.9 | 1511027                 |                                   |
| NEW | 1550                   | 1021399   | 8382             | 18.50           | 12.60 | 39.76 | 28.35 | 29.72 | 24.21 | 51.73 | 74.45 | 15.63 | 14.86 | – | 56.18 | –   | 16.26 | 11.42 | 29.8 | 1511028                 |                                   |
| NEW | 2000                   | 1021408   | 11868            | 20.47           | 15.16 | 44.88 | 30.31 | 31.89 | 26.77 | 55.59 | 83.46 | 16.97 | 15.94 | – | 62.87 | –   | 17.60 | 12.70 | 32.1 | 1511029                 |                                   |

5:1 Design Factor. Maximum Proof Load is 2 times the Working Load Limit on 7 through 300 metric tons (except for 125 metric tons which is proof tested to 1.6 times the Working Load Limit). Maximum customer Proof Load is 1.5 times the Working Load Limit on 400 through 2000 metric tons (available on customer request at time of order 2x WLL).





[kitocrosby.com/widebody](http://kitocrosby.com/widebody)

