


| REV | DESCRIPTION | BY | DATE | CN |
|-----|---|---------|-------------|-------|
| A | RELEASE TO PRODUCTION | REBEALL | 17-JUN-2022 | 33990 |
| B | UPDATE PL STATEMENT NOTE 3 ADD COATS TO NOTE 5 BOW & BOLT MODEL UPDATE | J.LEWIS | 18-OCT-2022 | 34308 |
| C | EYEBOLTS: 1045995 WAS 1045913; 38.1 WAS 35.3; 903 WAS 884. | REBEALL | 13-FEB-2023 | 34436 |
| D | BOW MODEL UPDATE | J.LEWIS | 08-AUG-2023 | 34541 |
| E | ADD REPLACEMENT TABLE; UPDATE FORMAT; UPDATE MODEL; ADD (VL) ADD NOTE 6 | J.LEWIS | 20-FEB-2024 | 34715 |
| F | UPDATE PROOF TEST NOTES; UPDATE (VL) LOCATIONS | J.LEWIS | 29-JUL-2024 | 35106 |

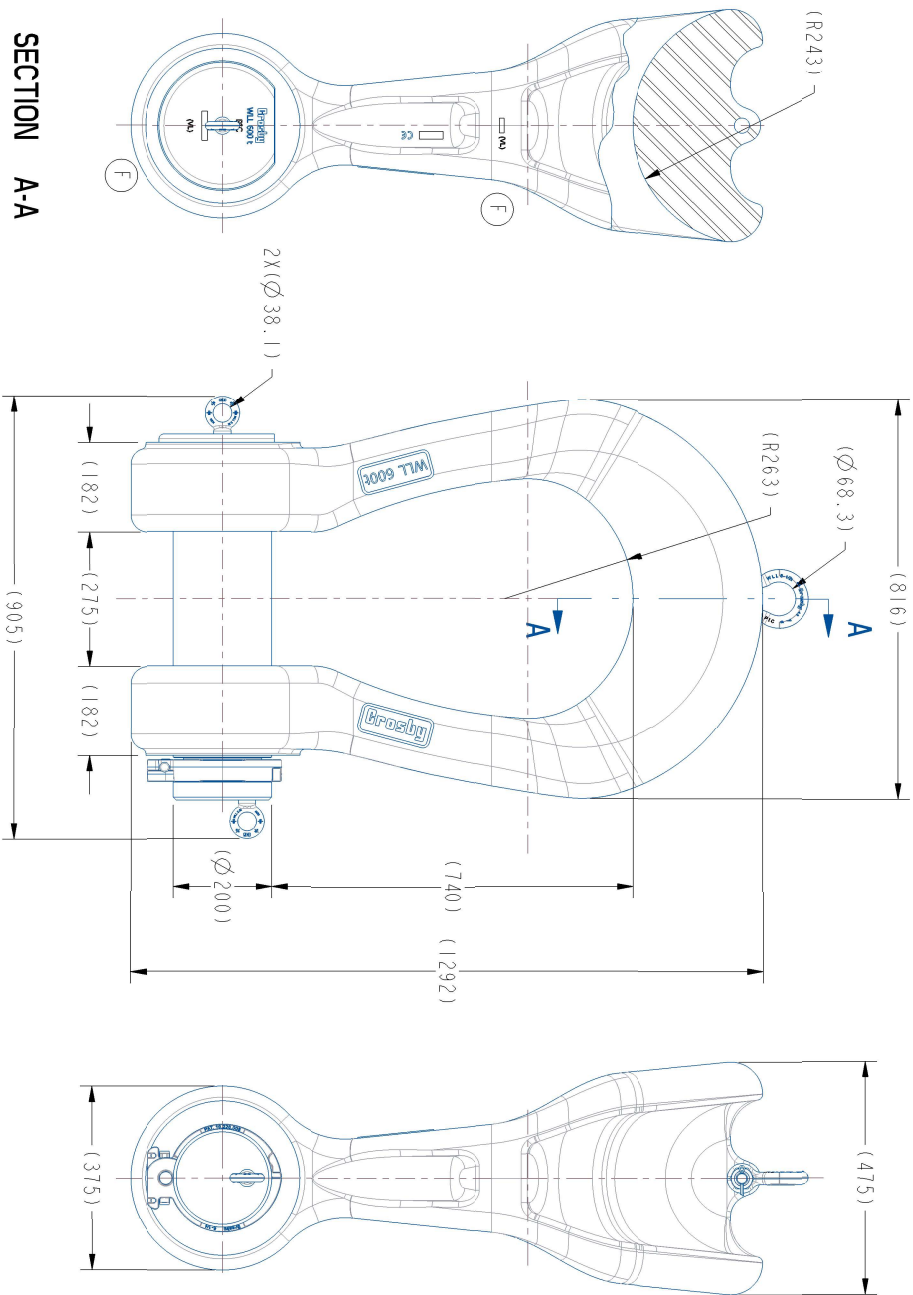

SECTION A-A

| SERVICE PARTS | | UNLESS OTHERWISE SPECIFIED: ALL DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS ARE BEFORE COATING BREAK ALL SHARP EDGES. MACHINE SURFACES. | | COATING: SEE NOTES | | STATUS: PRODUCTION | | TITLE: SHACKLE WIDE BODY 2160E ASSEMBLY 600 TONNE | |
|---------------|--------------------------|---|--------------------|---|---|--------------------|-------------|---|------------------|
| PN | DESCRIPTION | THIRD ANGLE PROJ | METRIC TOLERANCES: | MATERIAL: | HEAT TREATMENT: | DRAWN BY: | REBEALL | APPROX WEIGHT: 979.20 kg | PART NO: 1021355 |
| 1019551 | SHK ANCH GL 8-1/2" 62130 | DO NOT SCALE | LINEAR ANGLE N/A | N/A | N/A | DATE: | 19-DEC-2022 | SCALE: DRAWING NO: | SHEET |
| 1045995 | BLT EYE MACH M-20 | INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5-2009 | ANGLE N/A | DISCLOSURE OF THIS DOCUMENT IS NOT PERMITTED UNLESS AUTHORIZATION IS EXPRESSLY GRANTED IN WRITING BY THE CROSBY GROUP LLC | REFERENCE: DNVGL-ST-0378; ITP-2022.0044; RAL 9006; RAL 3001 | ENGINEER: | J.LEWIS | 1:10 | 1021355 1 OF 1 |
| 2038021 | EASY-LOC AY 6 1/4 | | | | | PRODUCT LINE: | 2160E | | |
| 1511041 | 600T 2160E BLT KIT | | | | | SIZE: | N/A | | |

- NOTES:
- WORKING LOAD LIMIT: 600 METRIC TONS @ 5:1 DESIGN FACTOR.
 - PROOF TEST LOAD: 1200 METRIC TONS (2XWLL) (MFG ONLY)
 - CUSTOMER OR THIRD PARTY PROOF LOAD SHALL NOT EXCEED 900 METRIC TONS (1.5XWLL)
 - TESTING AND DOCUMENTATION PER ITP-2022.0044.
 - COATING:
 - BOW: ALKYD-PRIMER RAL 9006, (2-3 COATS)
 - BOLT: ALKYD-PRIMER RAL 3001, (2-3 COATS)
 - EASY-LOC: NONE
 - BOW AND BOLT SHALL BE STAMPED "(VL)" SIZE 10