
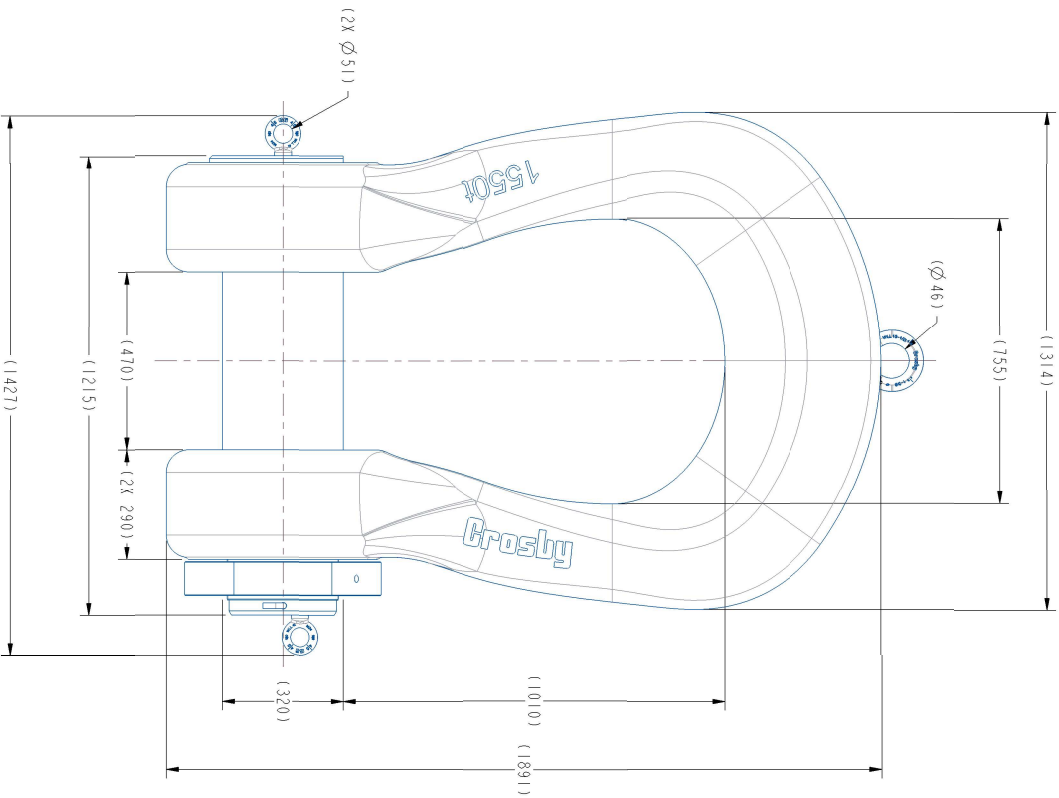


SERVICE PARTS	
PN	DESCRIPTION
1511028	1550T 2160 BLT KIT
1019613	SHK BLT-T ANCH GL 13.50 TN G2130
1046029	BLT EYE MACH M-24
3707985	LOCK PIN 16X475

REV	ZONE	DESCRIPTION	BY	DATE	CHK
A	N/A	RELEASE TO PRODUCTION	J LEWIS	30-AUG-2023	34215
B	A4-B4	UPDATE PROOF TEST NOTES, UPDATE (V1) LOCATIONS	J LEWIS	29-JUL-2024	35106

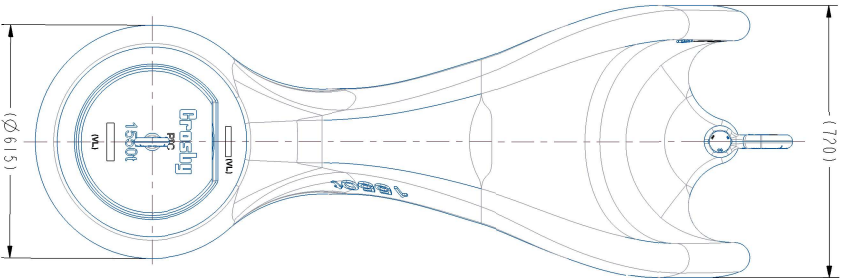

- NOTES:
- WORKING LOAD LIMIT: 1550 METRIC TONS @ 5:1 DESIGN FACTOR.
 - PROOF TEST LOAD: 2325 METRIC TONS (1.5XWL)
 - MEG MAX PROOF LOAD: 3100 METRIC TONS. (2XWL)
 - AVAILABLE ON CUSTOMER REQUEST AT TIME OF ORDER
 - TESTING AND DOCUMENTATION PER ITP-2022.0044.
 - COATING:-
 - BOW: NUT: ALKRD-PRIMER RAL 9006, (2-3 COATS)
 - BOLT: ALKRD-PRIMER RAL 3001, (2-3 COATS)
 - BOTH BOW AND BOLT SHALL BE STAMPED "V1", USE 15 SIZE STAMP

<div>UNLESS OTHERWISE SPECIFIED: ALL DIMENSIONS ARE IN millimeters. DIMENSIONS ARE BEFORE COATING. BREAK ALL SHARP EDGES. MACHINE SURFACES: ∇</div>				<div>COATING: SEE NOTES</div>		<div>STATUS: PRODUCTION</div>			
MATERIAL: N/A				MATERIAL: N/A		PROPOSED: N/A			
HEAT TREATMENT: N/A				HARDNESS: N/A		DRAWN BY: JLEWIS			
TOLERANCES:				DATE: 29-Aug-2023		TITLE: SHACKLE WIDE BODY G-2160 ASSEMBLY 1550 TONNE			
LINEAR $\pm .25$				ENGINEER: JLEWIS		PRODUCT LINE: 2160			
REFERENCE: DNVGL-ST-0378; ITP-2022_0044; RAL 9006; RAL 3001				PRODUCT LINE: 2160		SUPERSEDES: N/A			
DO NOT SCALE				ANGLE $\pm 0.5^\circ$		SCALE 1:10			
THIRD ANGLE PROJ				SCALE 3601.38 kg		DRAWING NO: 1021399			
INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5-2009				DISCLOSURE OF THIS DOCUMENT IS NOT PERMITTED UNLESS AUTHORIZATION IS EXPRESSLY GRANTED IN WRITING BY THE CROSBY GROUP LLC		PART NO: 1021389			
						SHEET 1 OF 1			